

Thanks very much for choosing our Eagle Bluetooth gamepad. In order to give you a great game playing experience, detail user manual is provided. Please read it carefully before using and properly keep it for reference.

- Ø To ensure safe and proper using, please read the manual fully and read safety instructions of gamepad before using.
- Ø The instructions contained in this manual are based on the default settings of the gamepad.
- Ø All the pictures, information provided in this user manual are for reference only, the actual product shall prevail. Please note that no notice will be provided when there is update. Update will be added in new user manual. Our company reserves the right of final interpretation.
- Ø Available functions and additional service might vary from different device, software and service providers.



Assembly methods



Product Description

Bluetooth connection without driver installation and the connection time is just 3-5 seconds.

Built-in lithium battery and comes with USB charging cable.

Super-cool design of multifunction mobile phone bracket.

Game functions are up to 18 action keys design.

Auto sleep and auto power connection design.

Product Specifications

Connection mode: Bluetooth and OTG/USB cable.

Application Platform: Android/IOS/PC, smart TV, smart TV box.

Bluetooth receiving distance and range: 10M/360 degree.

Battery capacity: built-in lithium battery, 500mAh.

Charge voltage: DC-5V.

Charging port: MICRO USB.

Charging time: 1-2 hours.

Continuous working hours: 35hours.

1 .Before Using

EG001 Bluetooth Gamepad support Android, Windows and IOS platform. Also can be used on PC, and support updating program by USB port on PC (original updating tool is needed). EG001 Bluetooth gamepad to be used on the device with android 3.2/Bluetooth are preferred.

Function introduction

EG001 Bluetooth Gamepad has four modes: Gamepad, Keyboard, Touch, Icade. It supports various mobile phone or tablet with android and ISO system. Gamepad, Keyboard, Touch mode support android device, Icade mode only supports IOS device. Eagle use HID protocol to transfer the data.

Power button using

1.2.1 Power on and power off

- 1) Start up: Please press HOME key first and turn Bluetooth on, loosen the HOME key when the Blue tooth indicator light quick flashing, EG001 is going to connect with the paired device.
- 2) Memory function: Next time, when you boot the device, you only need to turn Bluetooth on, the device connected to be paired with gamepad successfully will connect automatically based on the successfully matched mode last time. If it is not connected, EG001 will shut down after 15 seconds, and then please repeat the first operation above.
- 3) Auto sleep: If no gamepad operation within 10 minutes, it will enter into sleeping automatically. Please turn Bluetooth on or press HOME key to activate it again.

1.2.2 Paring and Connection

- 1) When gamepad connects to device successfully, enter into pairing mode by pressing combination key. Combination Key patterns are as below:

Pattern	Gamepad	Keyboard	Touch	Icade
Key combination	Home+●●●	Home+●	Home+●●●●	Home+●●

Note: Press combination keys to automatically switch Gamepad, Keyboard, Touch pattern, no need to shut down gamepad.

Indication light state

- 1) When in low battery condition, indication light is red, and turns blue when it is full power.

Note: Please charge the gamepad when you see red indication light.

- 2) It will flash per 2 second when Bluetooth is connected successfully.
- 3) It will flash per 1 second when gamepad connects to Bluetooth device again.
- 4) Quick flash during first time pairing and connection.
- 5) When pairing or second connection fails, system will shutdown automatically, press HOME key or turn on power switch to start up.

Android (Gamepad) Mode

2.1 Turn mobile phone Bluetooth on.

2.2 Switch on Bluetooth gamepad pairing, press HOME key, switch Bluetooth on. Loosen the HOME key when the Blue tooth indicator light quick flashing. Mobile phone will find “EG001”, click it to pair and connect.

2.3 Press “HOME” first, and press“●●●”, EG001 is going to connect by “Gamepad” mode.

2.4 Android pattern connection “Except MTK CPU mobile, game controller’s Gamepad pattern and Keyboard pattern can set game keys of simulator. As for MTK CPU mobile, must press “HOME+●” to switch to Keyboard pattern to set game keys of simulator.

PPSSPP Emulator keypad setting demonstration



Clear all	Dpad Up	+	pad1.Up	
Restore defaults	Dpad Down	+	pad1.Down	
	Dpad Left	+	pad1.Left	X
	Dpad Right	+	pad1.Right	X
	○	+	pad1.[B]	X
	×	+	pad1.[A]	X
	□	+	pad1.[X]	X
	△	+	pad1.[Y]	X
	START	+	pad1.Start	X
	SELECT	+	pad1.Select	X
Back	L	+	pad1.L1	X
	R	+	pad1.R1	X

3. Windows (Keyboard) Mode

3.1. Turn on Bluetooth of computer.

3.2. Switch on Bluetooth gamepad pairing, press HOME key, switch Bluetooth on. Loosen the HOME key when the Blue tooth indicator light quick flashing. Computer will find “EG001”, click it to pair and connect. (Eagle can support all emulator games on PC)

3.3. Press “HOME” first, and press“●”, EG001 is going to connect by “Keyboard” mode.

3.4. Because of difference between different brands of Notebook and PC computers Bluetooth driver, there may not recognize free password when Bluetooth paring, then you can repeatedly retry paring, clicking on the system gives “input device paring “0000 ”options” can be connected.

4.Touch Mode (Note: Android devices need to get ROOT)

4.1. Turn on Bluetooth of Android device

4.2. Switch on Bluetooth gamepad pairing, press HOME key, switch Bluetooth on. Loosen the HOME key when the Blue tooth indicator light quick flashing. Computer will find “EG001”, click it to pair and connect.

4.3. Press “HOME” first, and press“●●●●”, EG001 is going to connect by “Touch” mode. Then


run the “EGtouch APK software” Eagle installed in your Android device, press “start connection” and “Device is connected successfully” will pop up when Android device is connected successfully.

4.4. Pressing the power key can pop or hide various function keys on screen of Android device, pop icon gamepad virtual functions entrusted by the fingers free to move, clicking on the icon of gamepad function keys by next two consecutive can be free to zoom in and out function keys size setting.

4.5. After entering the game, pressing HOME key can pop up virtual function keys, place function keys in the game need to click on the place. So you can handle the mapping function of each control action game.

4.6. Tick the “Touch” from “Setting---Developer-----Touch”on your Android device.

(as shown in the figure)

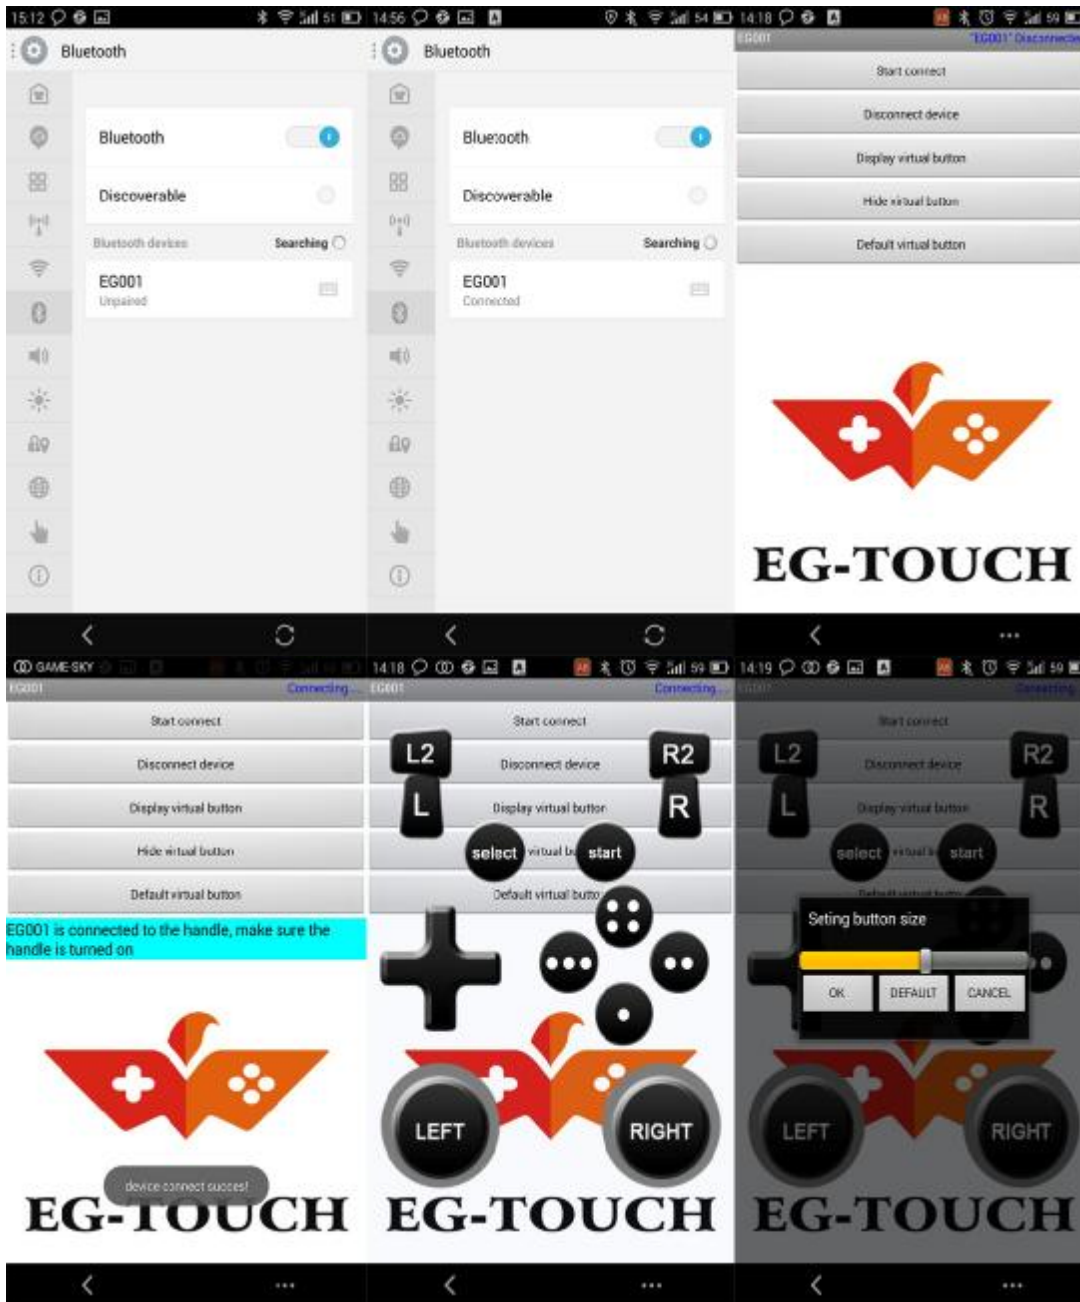



5. IOS (Icade Mode)

5.1. Turn on Bluetooth of IOS device

5.2. Switch on Bluetooth gamepad pairing, press HOME key, switch Bluetooth on. Loosen the HOME key when the Blue tooth indicator light quick flashing. Computer will find “EG001”, click it to pair and connect.

5.3. Press “HOME” first, and press“●●”, EG001 is going to connect by “Icade” mode.

5.4. IOS mode support Icade format games, short press of HOME key can pop up or hide the virtual keyboard input methods.

(as shown in the figure)

